




"Innovative Solutions for A Better Life"

UF U-220 : Hollow Fiber Ultrafiltration Cartridge

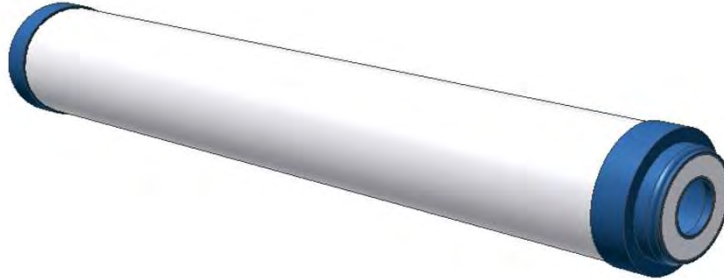

DIMENSION	Nominal Diameter	2,5 inch
	Length	55 cm
	Feed/Concentrate Connection	-
	Permeate Connection	-
	Weight	719 gram
FEATURES	Permeate Capacity	80 liter/hour
	Permeate Turbidity	<3 NTU
	Filtration Mode	Shell to Lumen (Dead End)
	Membrane Material	Polypropylene
	Pore size	0,01 micron
	Potting Material	Epoxy Resin
	Housing Material	PVC
	Storage Solution	0,1% Sodium Metabisulfite
OPERATION	Operating pressure	0,5 - 1,5 bar
	Operating temperature	max. 50 °C

The information contained in this publication is believed to be accurate and reliable, but is not to be construed as implying any warranty or guarantee of performance. We assume no responsibility, obligation or liability for results obtained or damages incurred through the application of the information contained herein.

GDP Filter - Filtration and Separation System

Jl. Cihanjuang No. 124 Km. 2,5 - Bandung 40559, Indonesia

Ph. : (022) 6648498, Fax. : (022) 6652139, E-mail : support@gdpfilter.co.id; Web : www.gdpfilter.co.id